




Produktkode: 5537

Hallingdal 65

Design: Nanna Ditzel

Fargepalett

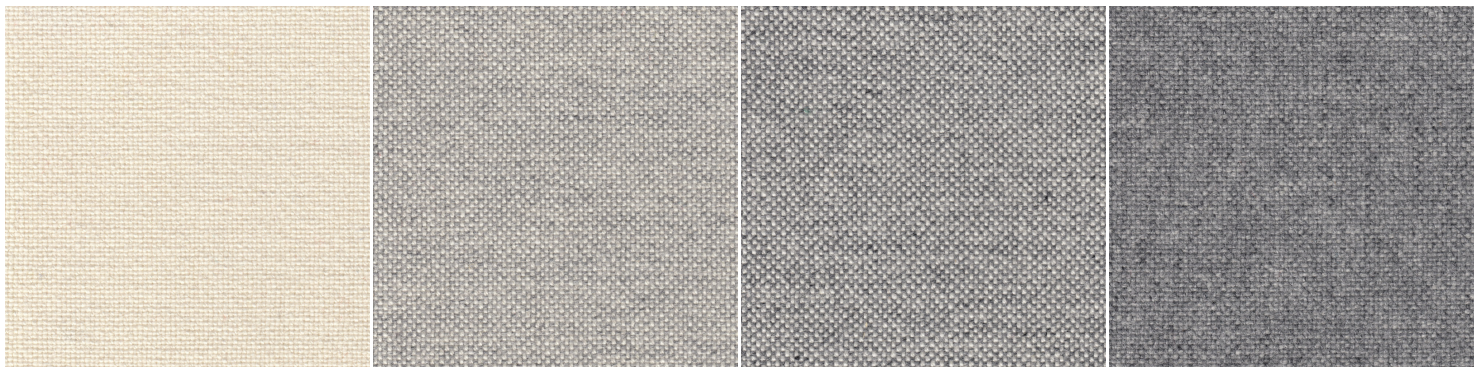


5537-130-100.jpg

5537-130-110.jpg

5537-130-116.jpg

5537-130-130.jpg

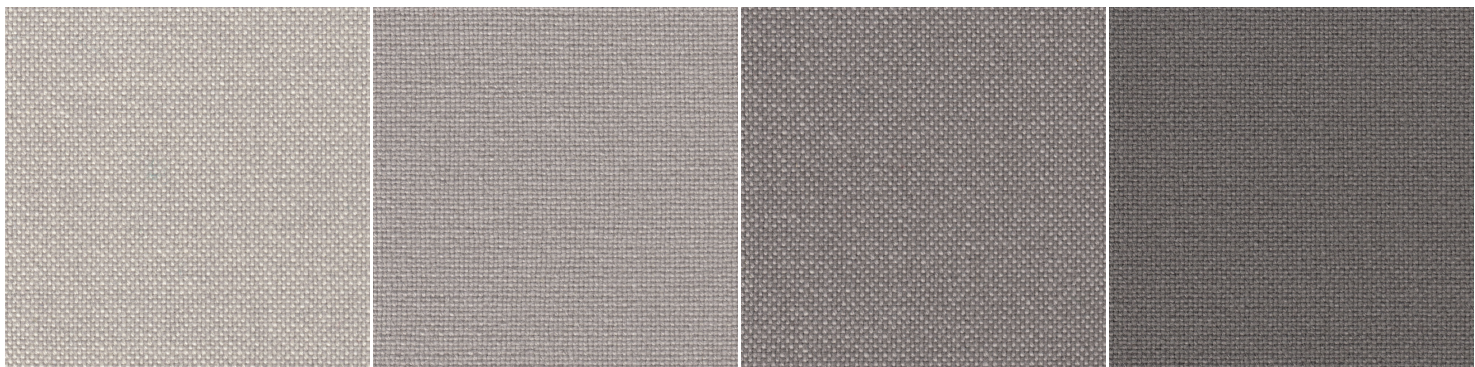

5537-130-103.jpg

5537-130-113.jpg

5537-130-123.jpg

5537-130-143.jpg




5537-130-200.jpg

5537-130-220.jpg

5537-130-227.jpg

5537-130-270.jpg

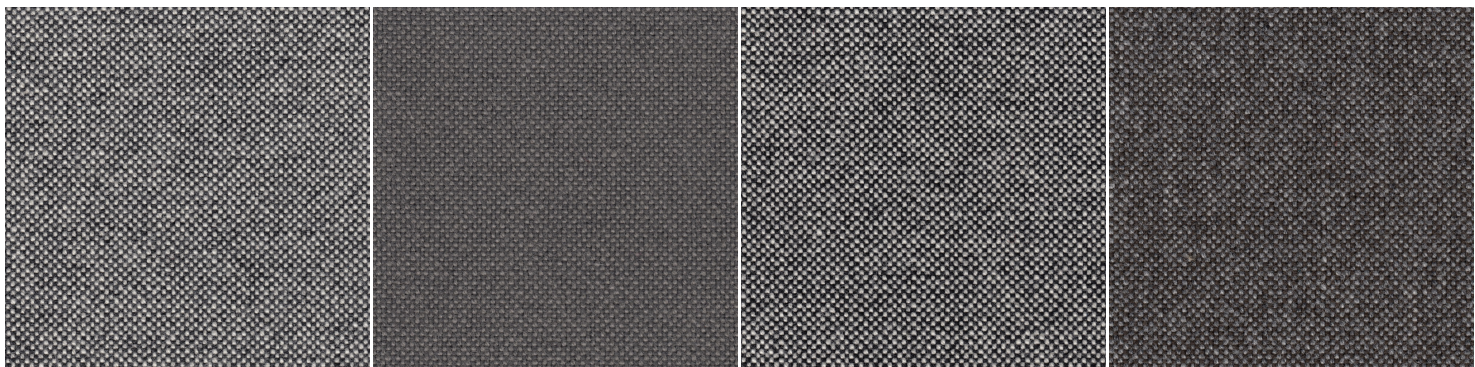


5537-130-126.jpg


5537-130-153.jpg

5537-130-166.jpg


5537-130-368.jpg

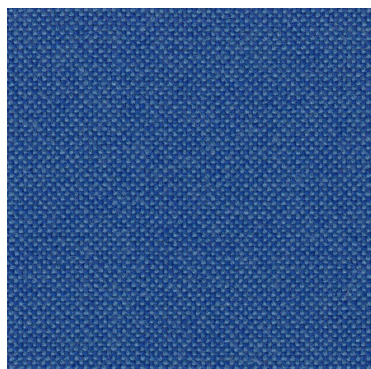


5537-130-733.jpg

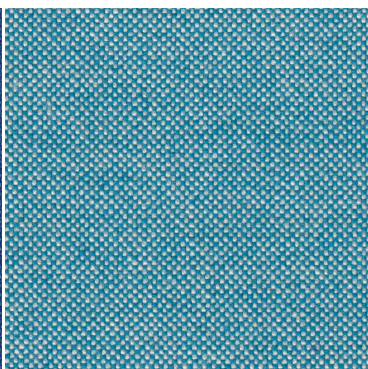

5537-130-840.jpg

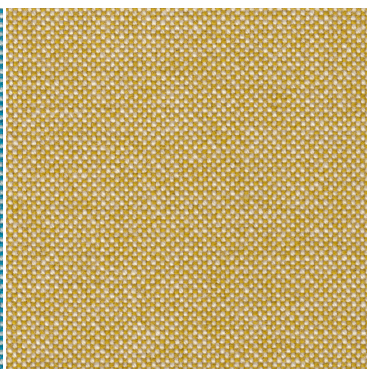


5537-130-407.jpg

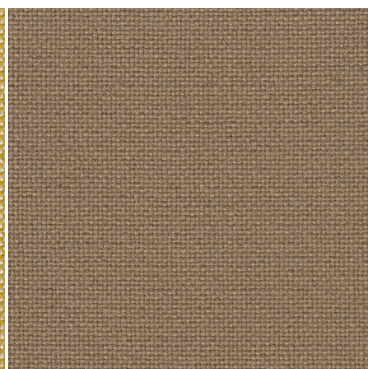


5537-130-224.jpg




5537-130-350.jpg

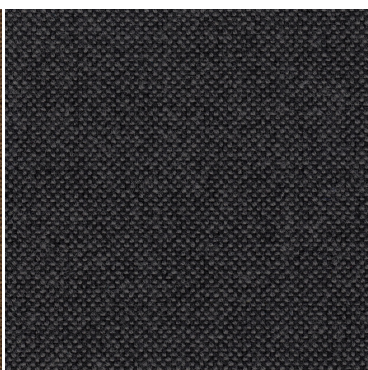

5537-130-173.jpg

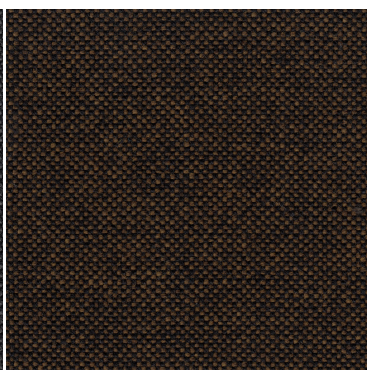


5537-130-370.jpg

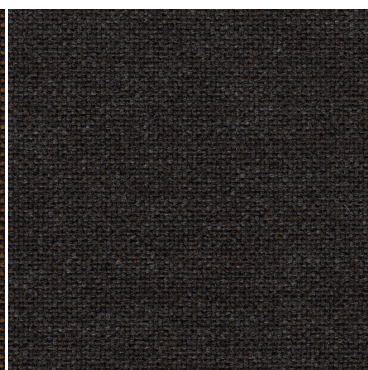


5537-130-376.jpg




5537-130-390.jpg

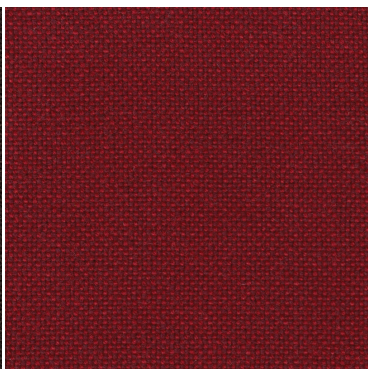


5537-130-687.jpg

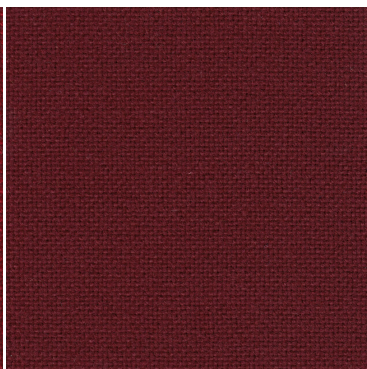


5537-130-694.jpg

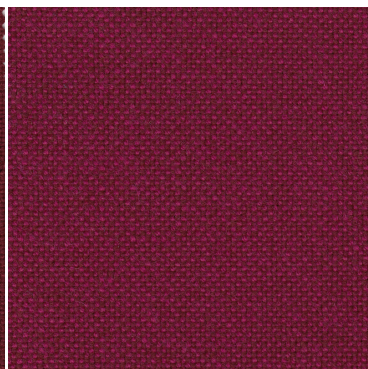

5537-130-573.jpg

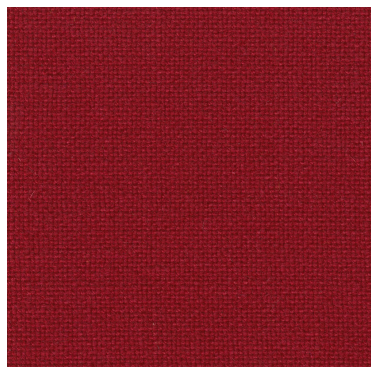


5537-130-657.jpg

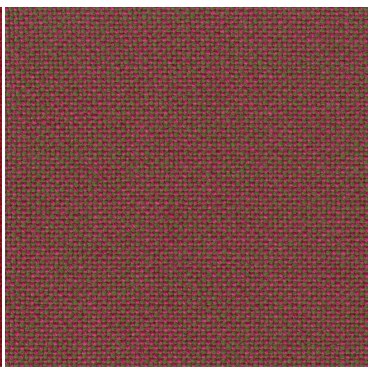


5537-130-660.jpg




5537-130-180.jpg

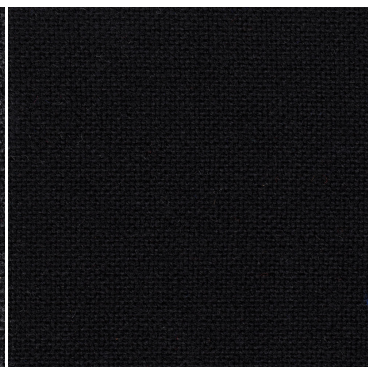


5537-130-190.jpg

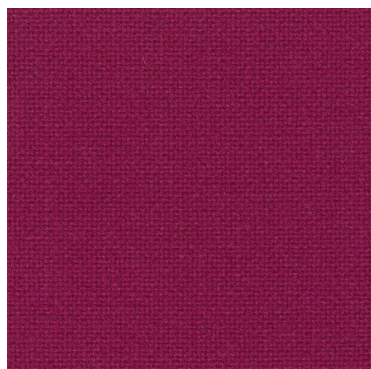


5537-130-563.jpg

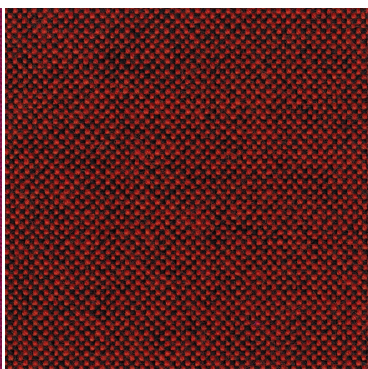


5537-130-596.jpg

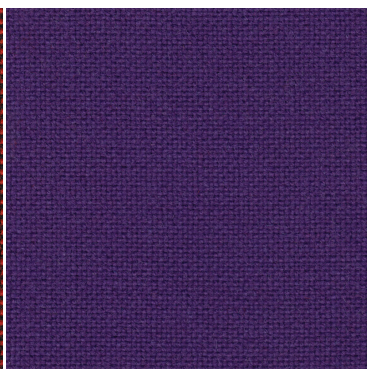


5537-130-702.jpg

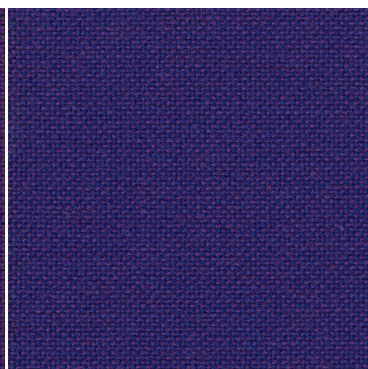


5537-130-763.jpg

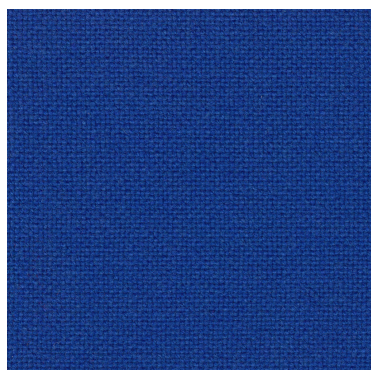


5537-130-750.jpg

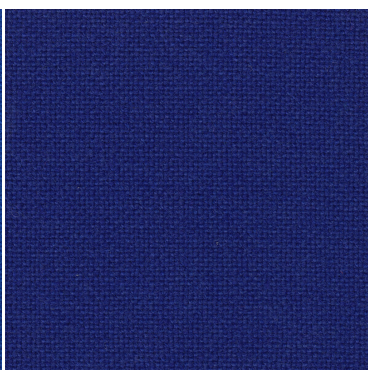


5537-130-753.jpg

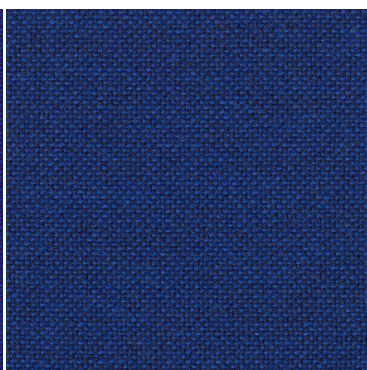


5537-130-754.jpg

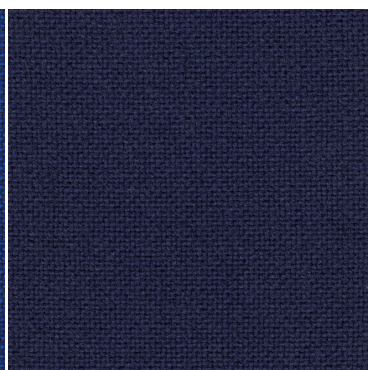


5537-130-764.jpg

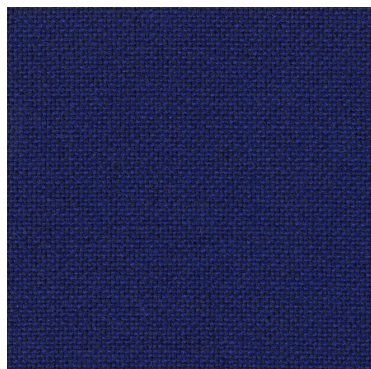


5537-130-773.jpg

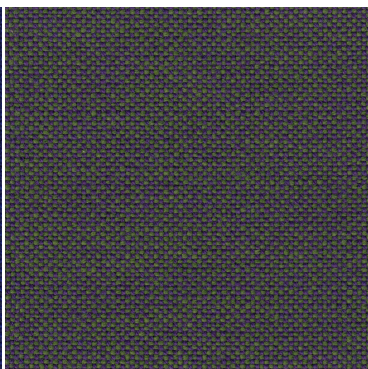


5537-130-968.jpg

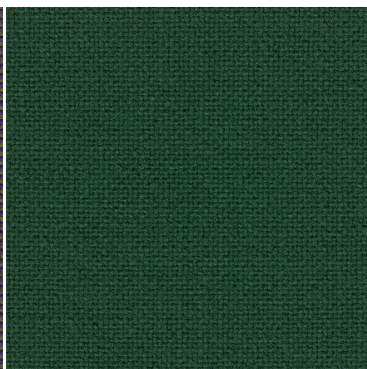


5537-130-944.jpg

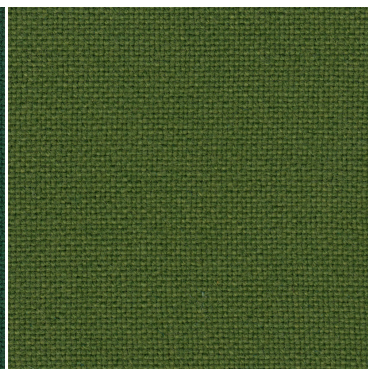


5537-130-960.jpg

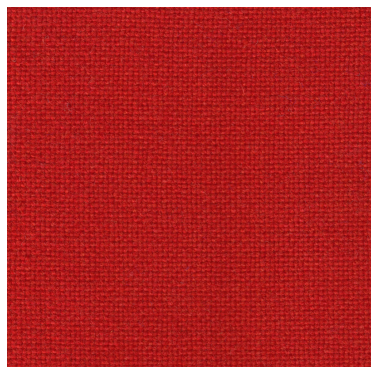


5537-130-600.jpg

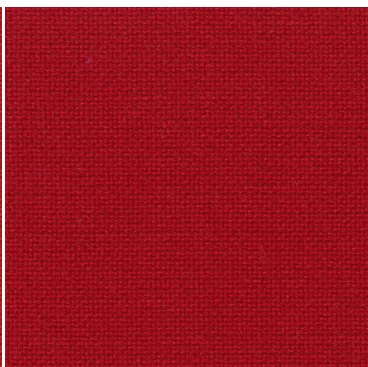


5537-130-674.jpg

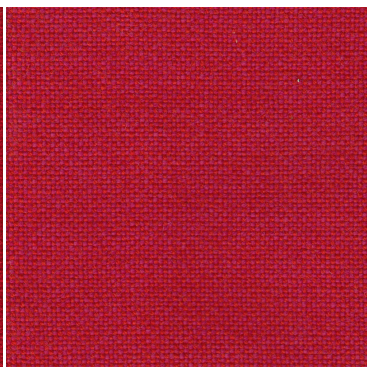


5537-130-680.jpg

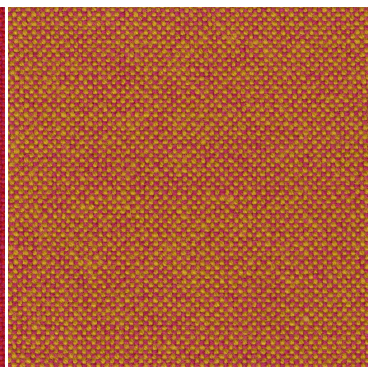


5537-130-526.jpg

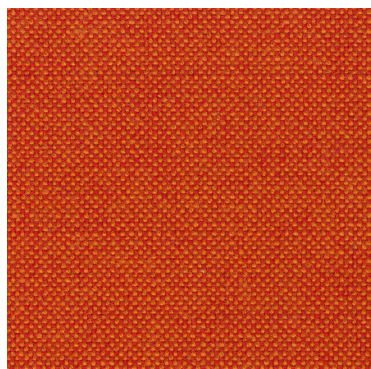


5537-130-590.jpg

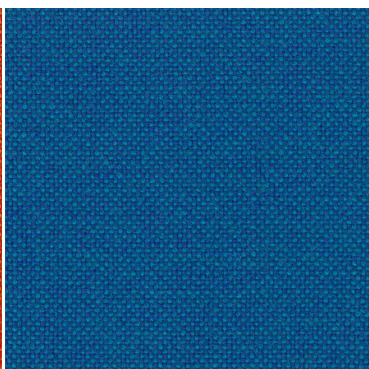


5537-130-810.jpg

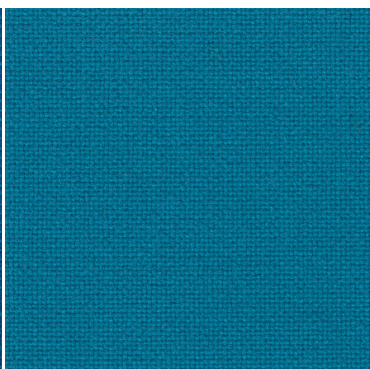


5537-130-850.jpg

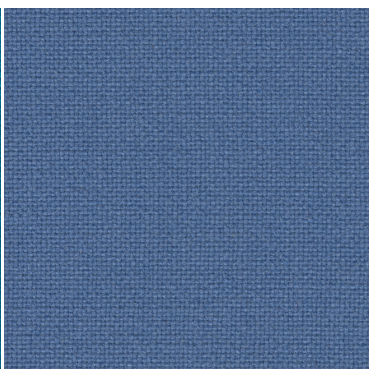


5537-130-723.jpg

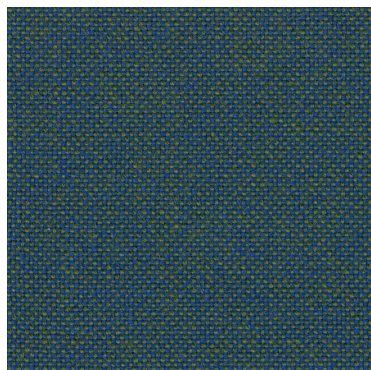


5537-130-890.jpg

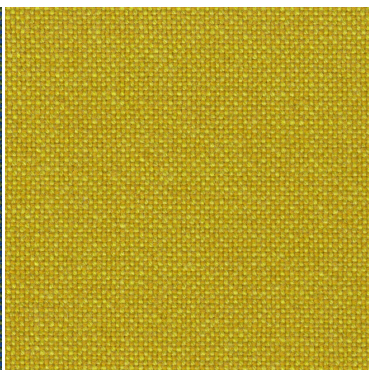


5537-130-420.jpg

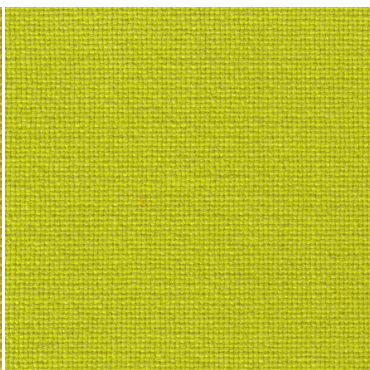


5537-130-907.jpg

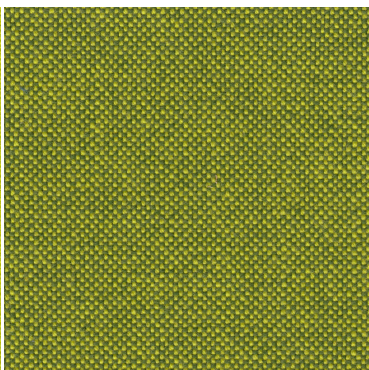

5537-130-980.jpg

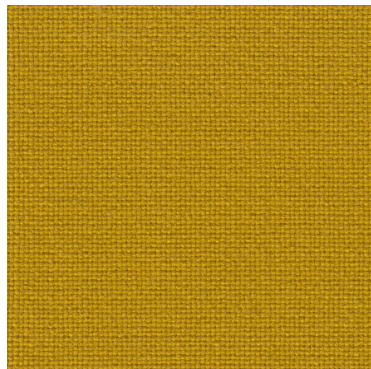

5537-130-457.jpg

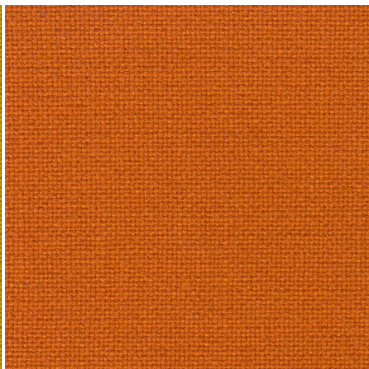

5537-130-547.jpg

Spesifikasjoner

Flammesikring	System.String[]
Designer	Nanna Ditzel
Tolltariffkode	NO 51.11.3000
Materiale	70% ny ull / 30% viskose
Vekt (g/m)	770
Bredde (cm)	130
Slitestyrke (rotasjoner på Martindale)	100000
Lysekthet (Skala 1-8)	5-7
Gniekthet tørr tilstand (Skala 1-5)	4
Gniekthet våt tilstand (Skala 1-5)	3-4
Flammesikring	FTP Code: Part 8 (IMO A652 (16)) EN ISO 1021: Part 1 and 2 BS 5852 part 2 (crib 5) Cal. TB117;2013
Rengjøring	Kjemisk rensing (P)
Rattmerke	Ja
EU-Blomsten	Ja